


A6005 LED DOWNLIGHT WITH MICROPRISMA UGR<19
DOWNLIGHT LED 596X596 MM
 RECESSED MOUNTING IN SUSPENDED CEILINGS

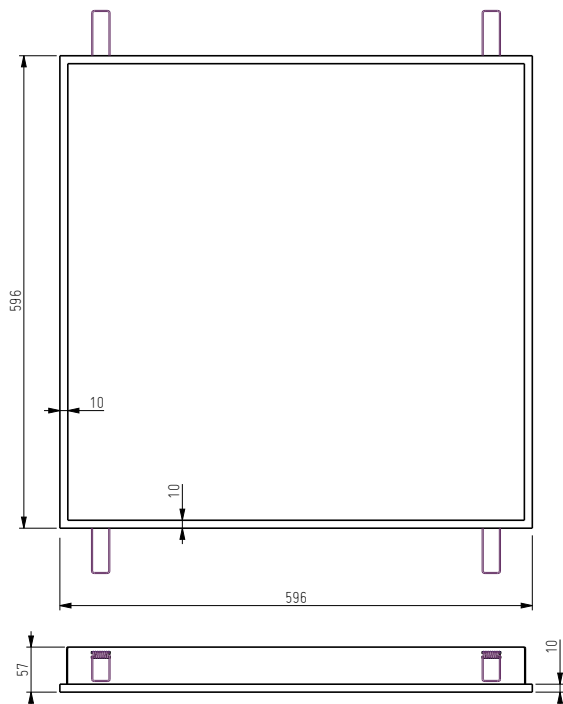

Order code

- A6005-3530G-ST-1P
- A6005-3540G-ST-1P
- A6005-4530G-ST-1P
- A6005-4540G-ST-1P

Type

- Downlight White with microprisma UGR<19
- Downlight White with microprisma UGR<19
- Downlight White with microprisma UGR<19
- Downlight White with microprisma UGR<19

Lamp

- LED 35W CRI>90 3000K 3100lm
- LED 35W CRI>90 4000K 3100lm
- LED 45W CRI>90 3000K 4150lm
- LED 45W CRI>90 4000K 4150lm

All fixtures also available with Dali or SwitchDim

Q7806-1630HM-DA-11

<p>[1] ARMATURKOD</p> <p>t.ex. Q600 Q790 Q30 KD5 KB0 DR6</p>	<p>[2] ARMATURTYP</p> <p>0 systemarmatur 1 takarmatur 2 pendelarmatur 3 väggarmatur 4 golvarmatur 5 infälld i undertak 6 spotlight 7 downlight 8 bordslampa 9 special</p>	<p>[3] WATTSTYRKA</p> <p>10 10 W 16 16 W 25 25 W etc</p>	<p>[4] FÖR LED-ARMATURER FÄRGTEMPERATUR</p> <p>27 2700 K 30 3000 K 40 4000 K</p> <p>FÖR ANDRA ARMATURER TYP AV LJUSKÄLLA</p> <p>T5 lysrör TC kompaktlysör HG halogen</p>	<p>[5] LJUSKVALITÉ (Ra-index)</p> <p>B Ra > 80 G Ra > 90 H Ra > 95 X Ra > 97</p>	<p>[6] REFLEKTORFÄRG ELLER BLÄNDSKYDD</p> <p>1 silver 2 grå 3 svart 4 guldeloxerad 5 koppareloxerad 7 gul lack 9 special</p> <p>O opalaliserat bländskydd T transparent bländskydd L linjärt bländskydd P microprisma</p>	<p>[8] ARMATURFÄRG ELLER ARMATURMATERIAL</p> <p>1 vit lack 2 grå lack 3 svart lack 4 gul lack 9 special</p> <p>C förkromad E eloxerad aluminium B betong K koppar M mässing</p>	<p>[7] DIMNING</p> <p>ST på/av (ej dimbar) DA DALI FD Fasdimning DX DMX SD Switchdim AN Analog 1-10V D4 one4all</p>	<p>[6] LJUSSPRIDNING</p> <p>N Narrow: 16° M Medium: 24° F Flood: 36° W Wide: över 40°</p>
---	---	---	--	--	--	--	--	---