



**Q6006 SPOTLIGHT VIT**  
**SPOTLIGHT EU 3-FASSKENA**  
**SPOTLIGHT EU TRACK ADAPTER**  
**STRAHLER EU 3-FASENADAPTER**

Designed by Peo Ström, Gerhard Rehm  
 Aluminium.  
 IP20 CE

RA 80

RA 90

RA 97

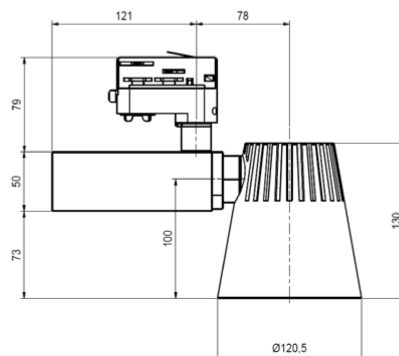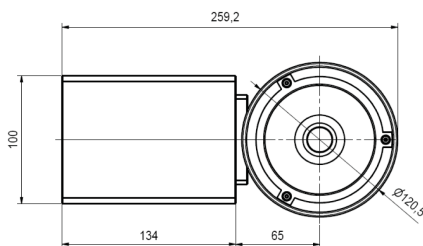

**LED**

30-55 W  
 3300-5100 LUMEN  
 3000 K  
 16/26/45 graders spridning  
 Bridgelux  
 High Efficiency  
 Best Light Quality

Order code	Type
Q 6006-55	Spotlight
Q 6006-50	Spotlight
Q 6006-45	Spotlight
Q 6006-40	Spotlight
Q 6006-35	Spotlight
Q 6006-30	Spotlight

Lamp
LED 55 W 5100 lm Aktiv cooling
LED 50 W 4800 lm Aktiv cooling
LED 45 W 4500 lm Aktiv cooling
LED 40 W 4100 lm Aktiv cooling
LED 35 W 3750 lm Aktiv cooling
LED 30 W 3300 lm Aktiv cooling

Lifetime 50 000 hours