


UN PROFILARMATUR
TAKARMATUR INFÄLLD I UNDERTAK
CEILING-RECESSED LUMINAIRE
DECKENLEUCHE

Designed by Inventron
 Eloxad aluminium / Anodized aluminium / Eloxiertem Aluminium
 Max L = 6000 mm
 Module measurements L = 1500, 3000
 Other measurements on request.
 Opalised/microprisma URL19 diffuser.
 IP20 alternativ IP 65 CE

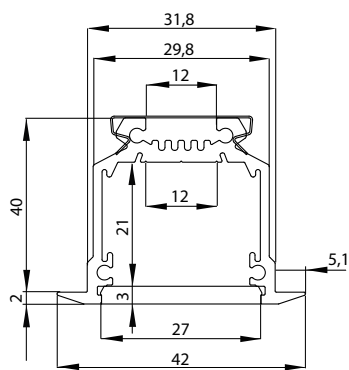

LED

20 W/m
 2000 lm/m
 2700/3000/4000 K
 120 graders spridning
 High Efficiency
 Best Light Quality

Order code	Type	Lamp
UN	Takarmatur infälld i undertak / Ceiling-recessed luminaire / Deckenleuchte	LED 20 W/m 2000 lm/m 2700 K
UN	Takarmatur infälld i undertak / Ceiling-recessed luminaire / Deckenleuchte	LED 20 W/m 2000 lm/m 3000 K
UN	Takarmatur infälld i undertak / Ceiling-recessed luminaire / Deckenleuchte	LED 20 W/m 2000 lm/m 4000 K